

PRICES IN EFFECT UNTIL DECEMBER 31ST, 2021









18" NOVA VOYAGER

Powerful direct drive 1.75 HP high torque motor with no pulleys or belts to cause vibration

DVR DRILL PRESS

Spindle taper MT #2
Comes with 5/8" drill ah
& key, firmware USB cab
knock-out wedge,adjustin

knock-out wedge, ad wrench and hex. key

58006

MILLING DRILLING MACHINE with SAFETY GUARD & LIMIT SWITCH PDM-30 • 16 1/2" swing • 1 1/4" Drilling capacity

3" Face mill capacity

Spindle taper R8

• 12 speeds (150-2500 RPM)

OPTIONAL TABLE POWERFEED ATTACHMENT **PFM-32**

For # PDM-30

5 PC. ACCESSORY ONUS PACKAGE FR

MILLING DRILLING MACHINE STAND



OPTIONAL Elevating block \$179

10" WET/DRY **SHARPENER KIT**

KC-4900S Heavy-duty 1.6 Amp, motor quietly rotates at 115 RPM

for maximum precision during

sharpening
Comes with angle guide honing
compound and a square edge
jig for sharpening a variety of

OPTIONAL 4 pc. Accessory Kit KM-130

(() ()

STATIONARY Thermally protected US Motor® 6.5 PEAK HP 6.5 peak HP motor **60 GALLON** AIR COMPRESSOR

KC-6160V3

16" NOVA VIKING

Powerful direct drive 1 HP high torque motor with no pulleys or belts to cause vibration

DVR DRILL PRESS

 Spindle taper MT #2
 Comes with 5/8" drill a & key, firmware USB cable, knock-out wedge;adjustmen wrench and hex. keys

83705

• 150 PSI max pressure

 13 4 CFM @ 40 PSI 11.2 CFM @ 90 PSI

2 cylinder cast iron single stage oil lubricated pump







5 PC. CUTTER HOLDER SETS

• Lathe chuck and drill chuck safety guards with limit switch protection and standard tool post safety guard Comes with 5"- 3 jaw chuck, imperial & metric change gears, quick change tool post with 1/2" capacity, steady rest, follow rest, thread chasing dial 1/2" drill chuck and tool box with adjusting tools















\$359.99

Heavy-duty steel construction

K-TYPE **SWIVEL BASE** MILLING VISES

Size 8"

KC-HVRT-8

POWERFEED **ATTACHMENT**

ONGITUDINAL

52/Amps (600**V**)

6"-KMV-3M KMV-4M KMV-6M

KMV-8M \$199. \$299. \$109. \$169.

8"-



KING

METAL GUITING BANDSAWS





• 3 speeds (80-120-200 FPM)

· Comes with wheels for portability





H.S.S. & BI-METAL BLADES								
	Model	Length	Width	Blade Material	TPI	Thickness		
	KBB-115-10	64 1/2"	1/2"	H.S.S.	10	.025"	\$15.99	
	KBB-115-14	64 1/2"	1/2"	H.S.S.	14	.025"	\$15.99	
	KBB-115-18	64 1/2"	1/2"	H.S.S.	18	.025"	\$15.99	
	KBB-115-24	64 1/2"	1/2"	H.S.S.	24	.025"	\$15.99	
	KBB-115-BM-10	64 1/2"	1/2"	Bi-Metal	10	.025"	\$37.99	
	KBB-115-BM-14	64 1/2"		Bi-Metal	14	.025"	\$37.99	
	KBB-115-BM-18	64 1/2"	1/2"	Bi-Metal	18	.025"	\$37.99	

5" x 6" **ADJUSTABLE DUAL SWIVEL METAL** HYDRAULIC **CYLINDER CUTTING BANDSAW** KC-129DS \$1049 8 Amp. (110V) Head swivels 0° - 45° to the right and 0° - 60° to the left Adjustable hydraulic KING downfeed control Automatic shut-off switch Adjustable ball bearing guides Portable design for easy movement

10" x 18"

METAL CUTTING BANDSAW

BI-METAL BLADES

KC-227-2 (220V) KC-227-6 (600V)

Model

Bandsaw into

a Cut-off Saw

SS-8377

- 4 speeds (114, 196, 288, 377 FPM) Carbide ball bearing blade guide
- Centralized control panel and automatic shut-off
- Adjustable hydraulic downfeed control

• To ensure reliable accurate cuts, both adjustable control arms can be positioned as close to the cut as possible

\$99.99

Length Width TPI Thickness Price KBB-8376-BM-1014 44 7/8" 1/2" 10-14 .020" \$21.99
KBB-8376-BM-1418 44 7/8" 1" 14-18 .020" \$21.99





H.S.S. BLADES



10" x 18" **VARIABLE SPEED SWIVEL METAL CUTTING BANDSAW**

KC-228S-V-2 (220V) KC-228S-V-6 (600V)

• Variable Speeds (73-312 FPM

Carbide ball bearing blade gr

Adjustable hydraulic downfeed cor Swivel base from 0° to 45°

 Coolant system with regulator valves provide an even flow of coolant to the blade

1)	2.6 Amp. @ 600V
uides	
al a contract	

BI-METAL BLADES

11.5 Amp. @ 220V

Length | Width | TPI | Thickness | Price







KBB-918-10

KBB-918-14

KBB-918-BM-610 131 3/4"

KBB-918-BM-812 | 131 3/4" | 1ⁿ

131 3/4"

131 3/4" 1

METAL QUITING BANDSAWS



10 .032

14

6-10

Bi-Meta

7" x 12" DUAL SWIVEL METAL **CUTTING BANDSAW**

KC-712DS

- Returning coolant system4 speeds (98-164-246-328 FPM)
- Automatic shut-off

Adjustable ball bearing guides



17" **VARIABLE SPEED METAL/WOOD CUTTING BANDSAW**

KC-1700WM-VS

- NC-17 UOW/N-V3

 Variable speeds (wood): 540-3600 SFPM

 Variable speeds (metal): 100-650 SFPM

 Voltage (input power): 220V, 1 phase, 60 Hz

 Comes with a 1/2" x 6 TPI wood cutting blade, 1/2" x 10 TPI metal cutting blade, laser guide, work lamp, miter gauge and a precision "TRU-RIP" aluminum rip fence with resaw guide



18" **METAL CUTTING BANDSAW**

KC-450

- Variable speed
- Handwheel controls speed
- Speed changes while the machine is in operation
- Comes complete with 4-way tilting table, and work light



METAL FORMING MAGHINES









MACHINE KC-RM22

Cutting capacity
(mild steel): 22 Gauge
Distance between shaft centers: 2"

Depth of throat to frame: 7'

• Includes 6 dies for hooking (2), burring, wiring, ogee beads and crimping

ARBOR PRESS

KAP-3

· Precision cut steel rams and pinions for accurate operation

Capacity: 3 Ton

 Diameter of work: 12 1/2"

Capacity over table: 12'

12" HAND SHEAR

KC-HS12

- Level arm with compensating spring
- Easy cutting across the entire length
- Rigid cutter body

\$275.

4 TON HAND NOTCHER

KC-N616

- Heavy cast-iron construction
- 16 Gauge notching capacity (mild steel)
- 18 Gauge piercing
- capacity (mild steel)
- Maximum notch (6" X 6" x 90°)Weight 165 lbs

\$749.

SLIP ROLLS

KC-S5016

- Max. length 50"Capacity 16 GaugeWeight 540 lbs

1899.

- KC-S3622 • Max. length 36"
- Capacity 22 Gauge
- Weight 176 lbs

\$899.

KC-S2422

- Max. length 24'

Capacity 22 GaugeWeight 81 lbs \$699.









\$95.

2 cylinder cast iron

single stage oil lubricated pump

5.5 PEAK HP 20 GALLON AIR COMPRESSOR

CING



COMPRESSOR OIL BOTTLE

KW-077 \$9.99 (850ml)

HIGH OUTPUT 6.5 PEAK HP 60 GALLON AIR COMPRESSOR

KC-5160V3

- 150 PSI max pressure
- 22.6 CFM @ 40 PSI
- 18.5 CFM @ 100 PSI

3 cylinder cast iron single stage oil lubricated pump

COMPRESSOR 2 cylinder cast iron single stage oil KC-7180V3-MS lubricated pump • 200 PSI max pressure High Performance 43 CFM @ 40 PSI

HP 80 GALLON AIR

\$23,99

HIGH OUTPUT 7.5 PEAK

TIRE INFLATION GUN

WITH PRESSURE **GAUGE**

• 28 CFM @ 175 PSI

NEW & IMPROVED

K-1630

Air Compressor with high output of 28 CFM @ 175 PSI



KC-3124V2

- 7.6 CFM @ 40 PSI

• 150 PSI max pressure 2 cylinder cast iron single stage oil lubricated pump







PREMIUM HYBRID POLYMER

GARDEN

K-5058GH

 $5/8" \times 50 \text{ ft.}$

HOSES



S69

KC-2051H2 • 150 PSI max pressure

• 7.6 CFM @ 40 PSI

6.0 CFM @ 90 PSI



ASMF

safety

valve

699.

ARCTIC FLEX (-40°C to 65°C) RETRACTABLE AIR HOSE
HYBRID POLYMER
INDUSTRIAL AIR HOSES
REEL WITH HYBRID
POLYMER AIR HOSE

\$109.99

K-5038FRL 50 ft. x 3/8"

All-Weather Flexibility (-40°C to 65°C)
 Comes with wall mounting hardware



K-10014FRL 100 ft. x 1/4"

All-Weather Flexibility (-40°C to 65°C) • 360° swivel base

\$45. 150 PSI (Working) / 450 PSI (Burst) Extreme All-Weather Flexibility Kink resistant

WET-DRY VACUUMS





CARTRIDGE


5/8" x 100 ft.

HEPA (high-efficiency particulate air) filters are designed to capture all particles that are 0.3 microns or smaller.

KVAC-1145 FITS: 8520LP, 8530LPN, 8531LP-B, 8540LST,



KVAC-1150 Fits: 8560LST

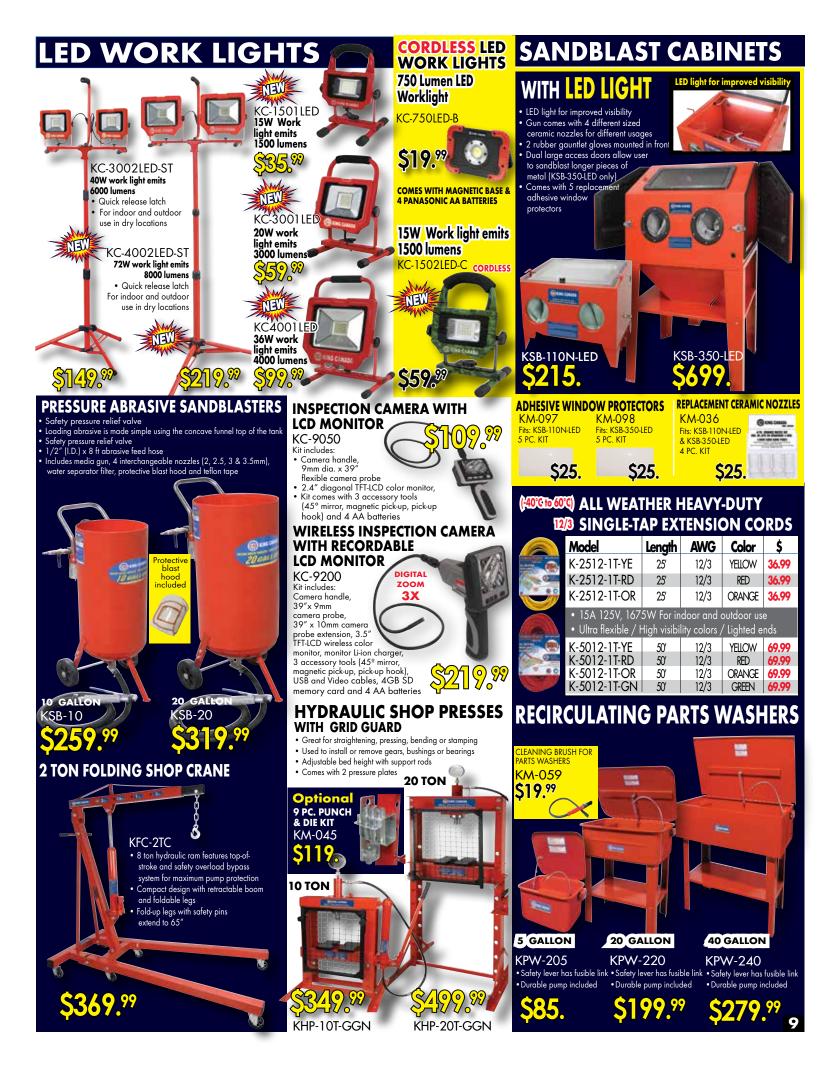

PORTABLE & GASOLINE GENERATORS & ACCESSORIES

950W PORTABLE GENERATOR

KCG-951G

- · Powerful 2 HP, 2 stroke air cooled motor
- Brushless alternator and electronic ignition
 Outlet: 120V/6.7 Amp. AC output
- Outlet: 12V/5.3 Amp. DC output
- · AC and DC circuit breakers and reset buttons for safe operation
- Comes with DC cables and spark plug socket



- Powerful 3 HP, 4 stroke air cooled motor
- · Electronic ignition
- Low oil shut-off with indicator light protects the engine
- Duplex Outlet: 120V/11.6 Amp. AC output
- Terminals: 12V, 8 Amp. DC output
- AC and DC circuit breakers for safe operation.
- Comes with DC cables and spark plug socket
- · Easy start recoil starter



- KCG-5100G
 Powerful 8 HP, 4 stroke air cooled OHV engine
- AVR system and electronic ignition
- Low oil shut-off with indicator light protects the engine
- Duplex outlet: 120V/20 Amp. AC
 Twist lock outlet: 120V/240V/30 Amp. AC
- · AC double throw circuit breaker and resets
- CSA & EPA approved



6500W GASOLINE GENERATOR WITH ELECTRIC START & WHEEL KIT

KCG-6502GE

- Powerful 10 HP, 4 stroke air cooled motor † AVR system and electronic ignition
- · Low oil shut-off with indicator light protects the engine
- Two duplex outlets: 120V/20 Amp. AC
- Twist lock outlet: 120V/240V/30 Amp. AC
- · Keyed electric start and easy start recoil starter
- · AC double throw circuit breaker and resets for safe operation



10000W GASOLINE GENERATOR WITH ELECTRIC START

KCG-10001GE

- Powerful 15 HP, 4 stroke air cooled motor
- AVR system and electronic ignition
 Low oil shut-off with indicator light protects the engine

- Two duplex outlets: 120V/20 Amp. AC
 Two twist lock outlets: 120V/30 Amp and 120V/240V/30 Amp
 Keyed electric start and easy start recoil starter
- AC double throw circuit breaker and resets for safe operation
- CSA & EPA approved



12000W GASOLINE GENERATOR WITH ELECTRIC START

KCG-12000GF

- Powerful 18 HP, 4 stroke air cooled motor
- AVR system and electronic ignition
- Low oil shut-off with indicator light protects the engine
- Two duplex outlets: 120V/20 Amp. AC
- Twist lock outlet: 120V/240V/30 Amp. AC
- Outlet: 120V/240V/50 Amp. AC
- Keyed electric start and easy start recoil starter
- · AC double throw circuit breaker and resets





GENERATOR EXTENSION CORDS

Converts a Nema L14-30P 240V 30 Amp Twist Lock plug into Nema 5-15/20R 120V 20A receptacles



K-L1430-25-4 Gauge (AWG)/Cord: 10
(SJTW 4/C) Light

K-L1430R-25 Extension cord length 25 feet Gauge (AWG)/Cord 10 (SJTW 4/C)

K-L1430-25EX1 Gauge (AWG)/Cord

50 AMP. GENERATOR ADAPTOR CORD

Nema 14-50P 120/240V plug to Nema 114-30R 120/240V twist lock receptacle
K-1450P-2 Female receptor with lighted and

Cord length: 1.5 feet

Gauge (AWG)/Cord: 10 (SJTW 4/C) \$69.99



12000W DUAL/FUEL GASOLINE/PROPANE GENERATOR

WITH ELECTRIC START

KCG-12001GE-DF

- Powerful 18 HP
- 4 stroke air cooled moto AVR system and electronic ignition
- · Low oil shut-off with indicator light protects the engine
- Two duplex outlets: 120V/20 Amp. AC
- Twist lock outlet: 120V/240V/30 Amp. AC
- Outlet: 120V/240V/50 Amp. AC
- Keyed electric start and easy start
- AC double throw circuit breaker and resets



Comes with propane tank connection cable







\$2499.99

METAL LATHES & ACCESSORIES

Θ

VARIABLE SPEED MINI METAL LATHE KC-0712ML

- 3/4" spindle bore
- Variable speeds 2 (0-1100, 0-2500 RPM)
- Comes complete with quick change gear box, face plate, steady rest, replacement gears, 4-way tool post, MT#2 dead center, threading dial indicator, - 3 jaw chuck, emergency stop button, chuck key and hex. keys

OPTIONAL CABINET STAND

SS-1022

S349.99



- KC-1022ML • 1" spindle bore
- Spindle speeds 6 (150-2400) RPM
- Comes complete with 5"-3 jaw chuck, 6-1/2"-4 jaw chuck, replacement gears, 4 way tool post, steady rest, follow rest, 8" face plate, thread chasing dial indicator, MT#3 dead center, full length splash guard, tool box, chuck key and hex. keys

GEARHEAD METAL LATHÉ

- 1 1/2" spindle bore
- Spindle speeds 9 (60-1500) RPM
 40(4-112 T.P.I) 30(.2 4.5mm) thread cutting
- 40(4-112 1.P.I) 30(.2-4.5mm) Inread culling
 Comes complete with 6".3 jaw chuck, 8".4 jaw chuck, imperial and metric gears, quick change tool post, steady rest, follow rest, 10" DI-4 camlock face plate, thread chasing dial indicator, MT#3 dead center, MT#3 arbor taper, 1/2" drill chuck, full length splash guard, tool box, chuck keys and hex. keys
 WITH TAPER ATTACHMENT
 KC-1236ML/SS-1236 KC-1236ML/KM-053/SS-1236

\$5999



(240V)



GEARHEAD METAL LATHE

- opindle speeds 8(70-2000 RPM)
- Spindle speeds 8(70-2000 RPM)
 34(4-56 T.P.I) 26(.4 7mm) thread cutting
 Comes complete with 6".3 jaw chuck, 8".4 jaw chuck, replacement gears, quick change tool post, steady rest, follow rest, 12" DI-4 camlock face plate, 2" Spindle Bore coolant system, full length splash guard, thread chasing dial indicator, 2 MT#3 dead centers, JT#5-MT#3 sleeve, chip tray, tool box, halogen lamp, chuck keys, hex. keys, and cabinet stand with foot brake

KC-1440ML-2

WITH TAPER ATTACHMEN

KC-1440ML-2/KM-054

16" X 40"



HIGH PRECISION "TOOL ROOM" METAL LATHE

- Spindle speeds 16(45-1800 RPM)
- 2" spindle bore diameter
- 45(2-72 T.P.I) thread cutting

Comes complete with 8"-3 jaw chuck with inside & outside jaws, 12"-4 jaw chuck, quick change tool post and two 3/4" tool holders, steady and follow rests with roller guides, 14" (D1-6) camlock face plate, MT #4 standard dead centre, MT #4 carbide tipped dead centre, MT #4 to MT #6 spindle sleeve adapter, halogen light, coolant system, full length splash guard, manual micrometer carriage

KC-1640ML

stop, tool box and wrenches

KC-1640ML/KM-055



KING

CORNE

FAGOR DIGITAL READOUT SYSTEMS



20i-T-840 (Fits KC-1440ML-6 & KC-1440ML-2

2/AXIS with 8" x 40" scales **S2299**.

20i-T-1040 (Fits KC-1640ML)

2/AXIS with 10" x 40" scales

LIVE CENTERS



KLC-3M TAPER SHANK - MT#3 Accurate

7 PC. DELUXE CUTTER HOLDER SETS

- 2 positions carbide indexable
- Cutter Inserts (5pc.)
- Kit comes in a wooden



KC-0712ML, KC-1022ML

KC-1236ML, 14440ML-2 14440ML-6, KC-1640GH,

TAPER ATTACHMENTS



These Taper Attachments are designed to fit our $12^{''} \times 36^{''}$, $14^{''} \times 40^{''} \& 16^{'''} \times 40^{''}$ Metal Lathes models KC-1236ML, KC-1440ML-2 & KC-1640ML

PC. QUICK CHANGE TOOL POST KITS



KQCT-1015

Fits most lathes between 10" to 15" swing

KQCT-1318 Fits most lathes between 13" to 18" swing