METAL SHOP FEVER







PRICES IN EFFECT UNTIL JUNE 30[™], 2022 **8" LOW SPEED LONG SHAFT BUFFER**

5-1/2" long arbor shafts extend out from the housing

Comes with two 8" x 1/2" spiral sewn cloth





2 cylinder cast iron

single stage oil

lubricated pump

ASME safety

valve





12" BENCH VARIABLE SPEED DRILL PRESS

KC-12HS-VS

- Powerful 1/2 HP, 5 Amp.
 Variable speeds (580 3200 RPM)
- Comes with 5/8" drill chuck, chuck key, onboard chuck key storage and adjustment hex. keys





15" FLOOR VARIABLE **SPEED DRILL PRESS**

KC-15HS-VS

- Powerful 3/4 HP, 8.6 Amp. motor
 4" stroke capacity allows drilling
- workpieces up to 4th thick Variable speeds 2 (2000)
- Variable speeds 2 (280 1100/ Comes with 5/8" drill chuck, chuck key, onboard chuck key storage and adjustment hex. keys 900-3300) RPM



• Two powerful 3/4 HP 110V motors

and tool box with adjusting tools

KC-1620CLM

16" X 20" COMBO LATHE/MILL

Comes with 5". 3 jaw chuck, imperial & metric change gears, quick change tool post with 1/2" capacity, steady rest, follow rest, thread chasing dial indicator, MT#3 & MT#4 dead centres, 1/2" drill chuck



16" NOVA VIKING **DVR DRILL PRESS**

83705

Θ

DVR with

Adaptive

BY: KING INDUSTRIAL

Control™ Software

- Powerful direct drive 1 HP high torque motor with no pulleys or belts to cause vibration
- Spindle taper MT #2
 Comes with 5/8" drill chuck
 & key, firmware USB cable,
 knock-out wedge, adjustment
 wrench and hex. keys



18" NOVA VOYAGER **DVR DRILL PRESS**

58006

The Most Innovative Drill Presses EVER

- Powerful direct drive 1.75 HP high torque motor with no pulleys or belts to cause vibration
- or belts to cause viviants or belts to cause viviants Spindle taper MT #2

 Comes with 5/8" drill chur

 1 --- firmware USB cable knock



MANAG	H.S.S. & BI	MET	AL B	LADES ("	SKII	P TOO	ΓH")
83- DATE MAN	Model	Length	Width	Blade Material	TPI	Thickness	Price
	KBB-712-10	93″	3/4"	H.S.S.	10		\$22,99
18	KBB-712-14	93"	3/4"	H.S.S.	14	.032"	\$22.99
400 Miles	KBB-712-18	93"	3/4"	H.S.S.	18	.032"	\$22.99
1000	KBB-712-BM-610	93"	3/4"	Bi-Metal	6-10	.032"	\$69.99
	KBB-712-BM-1014	93"	3/4"	Bi-Metal	10-14	.032"	\$69.99

7" X 12" METAL CUTTING BANDSAW KC-712BC

- 11.5 Amp. motor Coolant system
- · Adjustable ball bearing guides
- 4 speeds (85-130-180-235 FPM)





5.5 PEAK HP 20 GALLON AIR COMPRESSOR

KC-2051H2

• 150 PSI

KC-899LSB

Powerful 1/2 HP motor
Arbor shaft diameter: 5/8" Motor no load speed: 1,750 RPM

buffing wheels

max pressure

• 7.6 CFM @ 40 PSI

• 6.0 CFM @ 90 PSI



DRILLING MACHINE with **SAFETY GUARD & LIMIT SWITCH**

PDM-30

- 16 1/2" swing 1 1/4" Drilling capacity
- 3" Face mill capacity5" stroke
- Spindle taper R8



\$599. S PC AGGESSORY

BONUS PACKAGE TREE
INCLUDED WITH THE PURCHASE OF A
POM-30 MILLING DRILLING MACHINE
Includes: angle drill press vise,
drill chuck with key, drill chuck
arbor, carbide lipped face mill
and face mill arbor Life race mill arbor

MILLING DRILLING MACHINE STAND SS-45 Heavy-duty

\$379.2 steel constructi





OPTIONAL **STAND**

SS-1620CLM

\$449

(41-3/8" x 19-1/4" x 30-1/2")

K-2514H 25'x1/4" K-2538H 25'x3/8" \$29.99 K-5014H 50'x1/4" \$33,99 K.5038H 50'x3/8" \$44.99 K-10014H 100'x1/4' 300 PSI MAXIMUM PRESSURE K-10038H 100'x3/8'

RETRACTABLE AIR HOSE REELWITH HYBRID POLYMERAIR HOSE

K-5038FRL

50 ft. x 3/8"

All-Weather Flexibility (-40°C to 65°C)
Comes with wall mounting hardware



MANUAL AIR HOSE REEL WITH HYBRID POLYMER AIR HOSE K-10014FRL

100 ft. x 1/4"

 360° swivel base All-Weather Flexibility (-40°C to 65°C)



PREMIUM HYBRID POLYMER GARDEN

150 PSI (Working) / 450 PSI (Burst) **Extreme All-Weather Flexibility Kink resistant** K-5058GH K-10058GH











BENCH GRINDERS



12" HEAVY-DUTY BENCH GRINDER WITH FLOOR STAND

KING.

KC-1295 • Robust cast-iron wheel guards and dust vents with 2-1/2" T-fitting adaptor for dust collection Comes complete with floor stand. built-in cast-iron

quench tray, 36 Grit and 60 Grit 12" x 2" grinding wheels

1.5 HP **Direct Drive** Motor (220V)

4

2 HP **METAL DUST COLLECTOR** KC-7300C

- Powerful 2 HP, 220V motor
- 2 Step activation safety switch with line voltage interruption in case of power failure
- Ideal for collection of metal chips and abrasive dust produced by metal sanders, grinders, cold cut saws, deburring and chamfering machines
- Large metal chips colection drawer is easy to access and clean
- 6" inlet with Y-inlet adaptor with two 3" dust inlets allowing up to connect up to two metalworking machines
- Comes with large paper filter and iron activated carbon filter



FIREPROOF 3"METAL DUST COLLECTION HOSES KIT KM-102

Kits Includes: 2 - 8ft. (2.5M) 130°) Fireproof hoses 4 - Wire hose clamps (3")





DIGITAL FRACTIONAL CALIPER

- Converts to inches (decimal and fractional) and metric readings
- Waterproof to IP54 standards
- Two 3V Lithium batteries included



MAGNETIC SWITCHES

INTERRUPTION



110V (8-11 Amp.) KMAG-110-811 KMAG-110-1114 110V (11-14 Amp.) KMAG-110-1417 110V (14-17 Amp.) KMAG-220-811 220V (8-11 Amp.) KMAG-220-1114 220V (11-14 Amp.) KMAG-220-1417 220V (14-17 Amp.) KMAG-220-1721 220V (17-21 Amp.)

Comes with Canadian



KC-379MS

Sanding belt rotates on 7-1/2" vented drive wheel and solid rubber rear wheel for maximum tracking and sanding control

Head pivots up or down on base for easy and safe work heights


Horizontal working height of 36"



3"x 79" PURE ZIRCONIA SANDING BELTS

Model	Belt Size	Grit	Unit	Price
SB-379-60	3"x79"	60	1	\$19.99
SB-379-80	3"x79"	80	1	\$19.99
SB-379-120	3"x79"	120	1	\$19.99



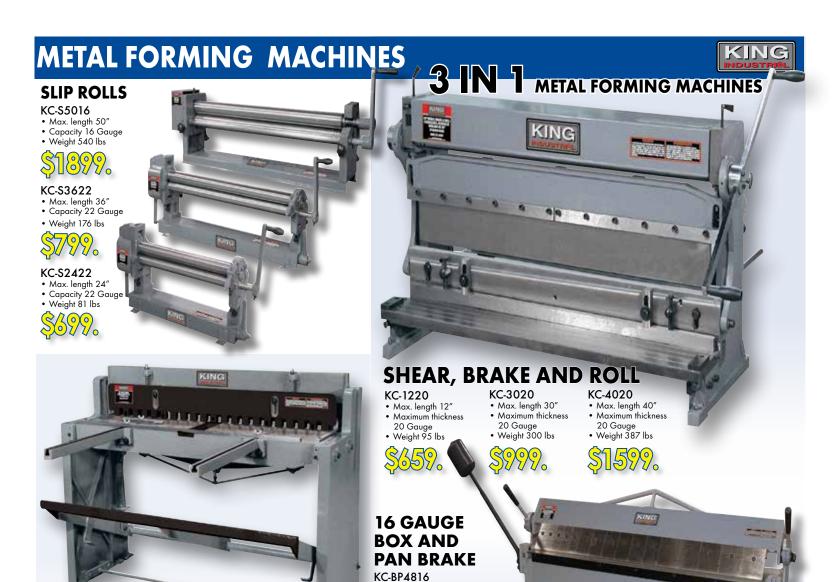

Bending length 48 1/2"Capacity 16 GaugeWeight 380 lbs

\$1399. NEW HEAVIER DUTY MODEL

12" HAND SHEAR

SHEAR

52" FOOT KC-F5216

KC-HS12

- · Level arm with compensating spring
- Easy cutting across the entire length
- Rigid cutter body



Cutting length 52"

Capacity 16 Gauge Weight 1080 lbs

4 TON HAND **NOTCHER**

KC-N616

- Heavy cast-iron construction
 16 Gauge notching capacity (mild steel)

- 18 Gauge piercing capacity (mild steel)
- Maximum notch (6" X 6" x 90°)
- Weight 165 lbs

ARBOR PRESS

KAP-3

- Precision cut steel rams and pinions for accurate operation
- Capacity: 3 Ton Diameter of work: 12 1/2"
- Capacity over table: 12"



COMBINATION ROTARY MACHINE

KC-RM22

- Cutting capacity
 (mild steel): 22 Gauge
- Distance between shaft centers: 2"
- Depth of throat to frame: 7"
- Includes 6 dies for hooking (2), burring, wiring, ogee beads and crimping











KC-1640ML & KC-1660GH

to fit our 12" x 36" , 14" x 40" & 16" x 40"

Metal Lathes models

KC-1236ML , KC-1440ML-2 & KC-1640ML

7 P.C. QUICK CHANGE



KQCT-0012 Fits most lathes up to 0 to 12" swing

KQCT-1015 Fits most lathes between

10" to 15" swing KQCT-1318

Fits most lathes between 13" to 18" swing



16" X 40"

GEARHEAD METAL LATHE

• Spindle speeds 8(70-2000 RPM)

• 34(4-56 T.P.I) 26(.4 - 7mm) thread cutting

hex. keys, and cabinet stand with foot brake



HIGH PRECISION "TOOL ROOM" METAL LATHE

- Spindle speeds 16(45-1800 RPM)
- 2" spindle bore diameter

KC-1440ML-2

- 45(2-72 T.P.I) thread cutting
- · Comes complete with 8"-3 jaw chuck with inside & outside jaws, 12"-4 jaw chuck, quick change tool post and two 3/4" tool holders, steady and follow rests with roller guides, 14" (D1-6) camlock face plate, MT #4 standard dead centre, MT #4 carbide tipped dead centre,

MT #4 to MT #6 spindle sleeve adapter, halogen light, coolant system full length splash guard, manual micrometer carriage stop, tool box and wrenches

KC-1640ML







WITH TAPER ATTACHMENT KC-1640ML/KM-055

KING

KING

METAL CUTTING BANDSAWS

PORTABLE VARIABLE SPEED METAL CUTTING BANDSAW



OPTIONAL Miter Stand turns this Bandsaw into a Cut-off Saw SS-8377



5" x 6" **METAL CUTTING BANDSAW**

• 3 speeds (80-120-200 FPM)



						_	
				I-METAL E			
	Model	Length	Width	Blade Material	TPI	Thickness	Price
THE RESERVE OF THE PERSON NAMED IN	KBB-115-10	64 1/2"	1/2"	H.S.S.	10	.025"	\$17.99
MY SHARRES	KBB-115-14	64 1/2"		H.S.S.	14	.025"	\$17.99
(KBB-115-18	64 1/2"	1/2"	H.S.S.	18	.025"	\$17.99
(SS#)	KBB-115-24	64 1/2"	1/2"	H.S.S.	24	.025"	\$17.99
1 2000	KBB-115-BM-10	64 1/2"		Bi-Metal	10	.025"	\$39.99
(" 1)	KBB-115-BM-14	64 1/2"		Bi-Metal	14	.025"	\$39.99
	KBB-115-BM-18	64 1/2"	1/2"	Bi-Metal	18	.025"	\$39.99

PRECISION PRESSURE

GAUGE

INDICATES

THE BLADE

TENSION

5" x 6" **DUAL SWIVEL METAL CUTTING BANDSAW**

KC-129DS



ADJUSTABLE

HYDRAULIC

CYLINDER

• Head swivels 0° - 45° to the right and 0° - 60° to the left

- Adjustable hydraulic downfeed control
- Automatic shut-off switch
- · Adjustable ball bearing guides
- Portable design for easy movement


8 Amp. (110V) KING

10" x 18"

METAL CUTTING BANDSAW

KC-227-2 (220V)

- KC-227-6 (600V)
 4 speeds (114, 196, 288, 377 FPM)
- Carbide ball bearing blade guide
- · Centralized control panel and automatic shut-off
- Adjustable hydraulic downfeed control
- To ensure reliable accurate cuts, both adjustable control arms can be positioned as close to the cut as possible



10" x 18" VARIABLE SPEED SWIVEL METAL **CUTTING BANDSAW**

KC-228S-V-2 (220V)

KC-228S-V-6 (600V)

- Variable Speeds (73-312 FPM
- · Carbide ball bearing blade gr
- · Adjustable hydraulic downfeed control
- Swivel base from 0° to 45°
- Coolant system with regulator valves provide an even flow of coolant

1)	2.6 Amp. @ 600V
uides	

BI-METAL BLADES

11.5 Amp. @ 220V

Model	Length	Width	TPI	Thickness	Price	
KBB-225-BM-610	122"	1"	6-10	.032"	\$99.99	
KBB-225-BM-812	122"	1"	8-12	.032"	\$99.99	





METAL CUTTING BANDSAWS



7" x 12" DUAL SWIVEL METAL **CUTTING BANDSAW**

KC-712DS

- Returning coolant system4 speeds (98-164-246-328 FPM)
- Automatic shut-off



17" **VARIABLE SPEED METAL/WOOD CUTTING BANDSAW**

KC-1700WM-VS

- North Process

 Variable speeds (wood): 540-3600 SFPM

 Variable speeds (metal): 100-650 SFPM

 Voltage (input power): 220V, 1 phase, 60 Hz

 Comes with a 1/2" x 6 TPI wood cutting blade, 1/2" x 10 TPI metal cutting blade, laser guide, work lamp, miter gauge and a precision "TRU-RIP" aluminum rip fence with resaw guide

18" **METAL CUTTING BANDSAW**

KC-450

- Variable speed Handwheel controls speed
- Speed changes while the machine is in operation
- · Comes complete with 4-way tilting table, and work light





2000W GASOLINE DIGITAL INVERTER GENERATOR

- Powerful 3 HP, 4 stroke air cooled motor
- Sine wave digital inverter generator provides stable current to power voltage-sensitive electronics

 DC USB port: 5V/2.1 Amp.

 DC cigarette lighter socket: 12V/8 Amp. DC output

- AC duplex outlet: 120V/20 Amp. AC output

4000W GASOLINE DIGITAL INVERTER GENERATOR

KCG-4000i

USB**a**s

- Powerful 7.5 HP, 4 stroke air cooled motor
- Sine wave digital inverter generator provides stable current to power voltage-sensitive electronics

- DC USB port: 5V/2.1 Amp.
 DC cigarette lighter socket: 12V/8 Amp. DC output
 AC duplex outlet: 120V/20 Amp. AC output
- AC twist lock outlet: 120V/30 Amp. AC outpu





control

KCG-15000GE

• Powerful 20 HP, V-Twin horizontal shaft 4 stroke air cooled motor

15,000W v-TWIN GASOLINE

GENERATOR WITH ELECTRIC START

- AVR system and electronic ignition
- Two duplex outlets: 120V/20 Amp. AC
- Twist lock outlet: 120V/30 Amp. AC
- Outlet: 120V/240V/50 Amp. AC
- AC double throw circuit breaker and resets
- Terminals: 12V/8.3 Amp DC with DC reset

AUTO-IDLE DOWN FUNCTION extends

running time by automatically adjusting engine speed to idle when not under load





5500 LBS CAPACITY

3 postion control handle

Max. raised height of forks 7 1/2" Min. height of forks 2.95"



QUICK RELEASE FOOT PEDAL

• 105' (KCG-2WPG) or 92' (KCG-3WPG) total head lift (total height at sea rever, can be raised above original water level) Powerful 7 HP,

4 stroke air cooled OHV engine







- Oil sensor shuts off engine when oil level is low
- Comes with 3 wire clamps, 2 hose adapters, 2 rubber gaskets, strainer basket and strainer basket adapter

Powerful 7 HP, 4 stroke air co





KCG-3WPG Standard

WATER PUMP HOSE KITS

Each hose kit comes with a type A threaded camlock adaptor

CLEAR PVC REINFORCED **SUCTION HOSES**

KW-253

3" X 25 ft

KW-252

2" X 25 ft

FLAT PVC DISCHARGE HOSES



KW-502 KW-503 2" X 50 ft 3" X 50 ft

GASOLINE ENGINES

 Ideal for compressors, generators, pressure washers, go-karts and log splitters Counterclockwise drive shaft direction

KCG-65 Powerful 6.5 HP 4 stroke air cooled



KCG-130 Powerful 13 HP 4 stroke air cooled OHV engines **\$449**



3000 PSI GASOLINE HIGH PRESSURE WASHER

KPW-3001FM

KC-2145N-NYL

KC-2748N-NYL (27" X 48") Nylon wheels

KC-2748NP (27" X 48") Poly wheels

QUICKRELEASE FOOTPEDALL

(21" X 45")

Nylon wheels

- 3000 PSI, 2.3 GPM maximum water flow Thermal relief valve on pump to
- protect against overheating 25' high pressure hose and inlet hose quick connect coupling
- Comes with 10" pneumatic wheels
- for portability and 4 quick connect nozzles (0°, 15°, 25°, 40° and detergent)





PORTABLE & GASOLINE GENERATORS & ACCESSORIES

950W PORTABLE GENERATOR

KCG-951G

- Powerful 2 HP, 2 stroke air cooled motor
- Brushless alternator and electronic ignition
- Outlet: 120V/6.7 Amp. AC output
- Outlet: 12V/5.3 Amp. DC output
- AC and DC circuit breakers and reset buttons for safe operation
- Comes with DC cables and spark plug socket

1800W GASOLINE GENERATOR

- Powerful 3 HP, 4 stroke air cooled motor
- Electronic ignition
- · Low oil shut-off with indicator light protects the engine
- Duplex Outlet: 120V/11.6 Amp. AC output
- Terminals: 12V, 8 Amp. DC output
- AC and DC circuit breakers for safe operation
- Comes with DC cables and spark plug socket
- · Easy start recoil starter

5100W GASOLINE GENERATOR WITH WHEEL KIT

KCG-5100G

- Powerful 8 HP, 4 stroke air cooled OHV engine
- AVR system and electronic ignition
- · Low oil shut-off with indicator light protects the engine
- Duplex outlet: 120V/20 Amp. AC
 Twist lock outlet: 120V/240V/30 Amp. AC
- · AC double throw circuit breaker and resets
- CSA & EPA approved



KCG-6502GE

- Powerful 10 HP, 4 stroke air cooled motor
- † AVR system and electronic ignition
- Low oil shut-off with indicator light protects the engine
- Two duplex outlets: 120V/20 Amp. AC
- Twist lock outlet: 120V/240V/30 Amp. AC
- Keyed electric start and easy start recoil starter
- AC double throw circuit breaker and resets for safe operation

10000W GASOLINE GENERATO WITH ELECTRIC START KCG-10001GE

- Powerful 15 HP, 4 stroke air cooled motor
- AVR system and electronic ignition
 Low oil shut-off with indicator light protects the engine

- Two duplex outlets: 120V/20 Amp. AC
 Two twist lock outlets: 120V/30 Amp and 120V/240V/30 Amp. 4C
 Keyed electric start and easy start recoil starter · AC double throw circuit breaker and resets for safe operation
- CSA & EPA approved



KCG-12000GE

- Powerful 18 HP, 4 stroke air cooled motor
- AVR system and electronic ignition
- Low oil shut-off with indicator light protects the engine
- Two duplex outlets: 120V/20 Amp. AC
- Twist lock outlet: 120V/240V/30 Amp. AC
- Outlet: 120V/240V/50 Amp. AC
- Keyed electric start and easy start recoil starter
- · AC double throw circuit breaker and resets





GENERATOR EXTENSION CORDS

Converts a Nema L14-30P 240V 30 Amp Twist Lock plug into Nema 5-15/20R 120V 20A receptacles

K-L1430-10 Extension cord length
10 feet Gauge (AWG)/Cord



K-L1430-25-41 Extension cord length
25 feet Gauge (AWG)/Cord: 10
(SJTW 4/C) Light

K-L1430R-25 Extension cord length 25 feet Gauge (AWG)/Cord: 10 (SJTW 4/C)





50 AMP. GENERATOR ADAPTOR CORD

Nema 14-50P 120/240V plug to Nema L14-30R 120/240V twist lock receptacle

K-1450P-2

Cord length: 1.5 feet Gauge (AWG)/Cord: 10 (STW 4/C)



12000W DUAL/FUEL GASOLINE/PROPANE GENERATOR WITH ELECTRIC START

KCG-12001GE-DF Powerful 18 HP.

4 stroke air cooled motor

- AVR system and electronic ignition
- · Low oil shut-off with indicator light
- protects the engine
- Two duplex outlets: 120V/20 Amp. AC
- Twist lock outlet: 120V/240V/30 Amp. AC
- Outlet: 120V/240V/50 Amp. AC
- Keyed electric start and easy start
- AC double throw circuit breaker and resets



Comes with propane tank connection cable





