



PORTABLE TABLE SAWS



PROTECT YOURSELF / 1-866-SAWSTOP / SawStop.com

August 2022

COMPACT TABLE SAW / CTS™



CTS-120A60

SAFETY UNLEASHED.

The freedom to work safely and accurately on any site makes the Compact Table Saw a must-have for any professional.

PRODUCT SPECS

Motor - 120 VAC 60 Hz, Universal

Max. Depth of Cut, Blade at 0° - 3-1/8"

Max. Depth of Cut, Blade at 45° - 2-1/8"

Max. Rip Capacity - 24-1/2"

Table Dimensions - 23" W x 22-5/8" D

Amperage - 15A

No Load RPM - 4,000

Blade - 10" (not compatible with Dado blades)

Weight - 68 lbs.

Accessory Storage

Everything in its place: Stow away tools and accessories in one location for easy retrieval.

Rack & Pinion Fence

Easy to adjust or remove and always square, the rack & pinion fence has built-in high and low shelf to support all types of cuts.

Portable Durability

Heavy-duty construction, that's built to last, provides the stability you need for smooth cuts on the job site. The compact size, carry handle and on-board storage mean you have everything you need at hand.

Quick Tilt

Quickly and easily tilt the blade to your ideal angle. Further fine tune with the micro-tilt adjust feature.

JOBSITE SAW PRO / JSS™



JSS-120A60

PROS NEVER STOP.

The SawStop Jobsite Saw Pro unites SawStop safety and pioneering innovation with compact portability.

PRODUCT SPECS

Motor - 1.5 HP, 120 VAC 60 Hz, Universal

Max. Depth of Cut, Blade at 0° - 3-1/8"

Max. Depth of Cut, Blade at 45° - 2-1/8"

Max. Rip Capacity - 25-1/2"

Table Dimensions - 31-1/4" W x 24-5/8" D

Amperage - 15A

No Load RPM - 4,000

Blade - 10" Standard, (8" Dado compatible)

Weight (with cart) - 113 lbs.

Accessory Storage

Find the Active Dust Collection Guard, riving knife, miter gauge and more, all protected and ready for quick use in the onboard storage drawer.

T-Style High/Low Fence

The Jobsite Saw T-Style Fence slides smooth and locks firm with one touch. Extend the On-Demand shelf for extra support, and use the low fence for safer cutting of low-profile pieces.

Easy Mobility

Simple, intuitive foot pedal extends the mobile cart for use and collapses the cart for transport. Large 8" multi-terrain wheels are ideal for the variable surfaces of a job site.

Active Dust Collection Guard

The included Active Dust Collection Guard captures above table dust particles and the attached splitter and anti-kickback pawls also help to protect against kickback.

ACCESSORIES AND BLADES

FOLDING STAND

Folding Stand for CTS / CTS-FS

(Shown both open and collapsed)

Supports CTS saws to provide an ergonomic workstation at any job site while collapsing for easy transport



INSERTS

Standard Zero Clearance Insert for JSS / TSI-SJB

Zero clearance for accurate cuts and reduced tearout when using 10" blades

Dado Zero Clearance Insert for JSS / TSI-DJB

Zero clearance for accurate cuts and reduced tearout with 8" dado blades

Standard Zero Clearance Insert for CTS / CTS-TSI

Zero clearance for accurate cuts and reduced tearout when using 10" blades



BRAKE CARTRIDGES

Standard Brake Cartridge / TSBC-10R3

The Standard Brake Cartridge stops the spinning blade on contact with skin reducing the chances of a catastrophic injury.

Dado Brake Cartridge / TSDC-8R3*

The Dado Brake Cartridge stops the spinning Dado blade on contact with skin reducing the chances of a catastrophic injury.



CARBIDE-TIPPED BLADES

10" 24-Tooth Blade / BTS-R-24ATB

General purpose, 24-tooth blade ideally suited for cutting and ripping softwoods and hardwoods.

10" 40-Tooth Blade / CNS-07-148

A high-quality, carbide-tipped, 40-tooth every day blade for both rips and cross cuts on a variety of woods.

10" 60-Tooth Blade / CB104 184

A high-quality, carbide-tipped, 60-tooth blade for precision cross cuts on softwoods and hardwoods.



TITANIUM SERIES BLADES

10" 40-Tooth Blade / BTS-R-40ATB

A premium, precision balanced, fully tensioned and heat treated multi-purpose 40-tooth blade for both rips and cross cuts on a variety of softwoods and hardwoods

10" 80-Tooth Blade / BTS-P-80HATB

A premium, precision balanced, fully tensioned and heat treated 80-tooth blade for cutting plywood and solid surfaces like melamine and MDF



DADO BLADE SET

8" Dado Set / BTS-DS8-2402*

Precision flat-ground chippers for dead flat dado bottoms—includes 6 shims for precise dado width adjustments.

Includes (2) 24-tooth blades, (5) 4-tooth chippers, and (6) shims



* Indicates product is not compatible with the Compact Table Saw

SAWSTOP SAFETY

A table saw accident happens once every nine minutes in North America. SawStop's revolutionary safety system reduces what could be a potentially life-changing injury into a scratch by stopping the spinning blade on contact with skin.



See the safety system in action:



HOW IT WORKS

DETECT

- The blade carries a small electrical signal.
- When skin contacts the blade, the signal changes because the human body is conductive.
- The change to the signal activates the safety system.




STOP

- An aluminum brake springs into the path of the blade.
- The blade comes to a complete stop and power to the motor is shut off.



DROP

- After the blade comes to a stop, the blade's angular momentum drives it beneath the table, removing the risk of subsequent contact.
- All of this happens in less than 5 milliseconds.

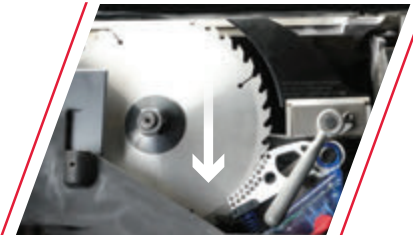

RESET

- Resetting the saw yourself is easy. Simply inspect the blade (and change if damaged) and replace the brake cartridge, and your saw is operational.
- The entire process takes 90 seconds and you're back to work.

